

07 - 03 .00

A

06/30/00

jc86 U.S. PTO

**PATENT APPLICATION TRANSMITTAL LETTER**  
(Large Entity)

Docket No.  
991331

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

David A. Johnske, Renee E. Richardson

For: **POINT OF PURCHASE DISPLAY**

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. EL 027 826 568 US
- ☒ 13 sheets of drawings.
- ☐ A certified copy of a application.
- ☒ Declaration ☐ Signed. ☒ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: **ACKNOWLEDGEMENT POSTCARD**

jc829 U.S. PTO  
09/609662  
06/30/00

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
<b>Total Claims</b>	11	- 20 =	0	x \$18.00	\$0.00
<b>Indep. Claims</b>	1	- 3 =	0	x \$78.00	\$0.00
<b>Multiple Dependent Claims (check if applicable)</b> <input type="checkbox"/>					\$0.00
<b>BASIC FEE</b>					\$690.00
<b>TOTAL FILING FEE</b>					\$690.00

- ☒ A check in the amount of \$690.00 to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. 04-1030 as described below. A duplicate copy of this sheet is enclosed.
  - ☐ Charge the amount of as filing fee.
  - ☒ Credit any overpayment.
  - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
  - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: **June 30, 2000**

*Richard D. Harris*  
Signature

**Richard D. Harris - Reg. No. 27898**  
**LAW OFFICES OF DICK AND HARRIS**  
181 West Madison Street, Suite 3800  
Chicago, Illinois 60602  
(312) 726-4000 (phone)  
(312) 726-5834 (fax)

cc:

**CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)**Applicant(s): **David Johnske, Renee E. Richardson**

Docket No.

**991331**Serial No.  
to be assignedFiling Date  
**June 30, 2000**Examiner  
to be assignedGroup Art Unit  
to be assignedInvention: **POINT OF PURCHASE DISPLAY**I hereby certify that this **PATENT APPLICATION***(Identify type of correspondence)*

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under  
37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on  
**JUNE 30, 2000**  
*(Date)*

**DOUGLAS B. TEANEY***(Typed or Printed Name of Person Mailing Correspondence)*  
*(Signature of Person Mailing Correspondence)***EL 027 826 568 US***("Express Mail" Mailing Label Number)***Note: Each paper must have its own certificate of mailing.**

## TITLE OF THE INVENTION

Point of Purchase Display

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention is directed to point of purchase displays, in particular point of purchase displays (POP's) for small products, like compact discs (CD's) or digital video discs (DVD's). The present invention is directed in particular to such point of purchase displays that are fabricated from paper, paperboard, and corrugated paper and corrugated paperboard materials.

### 2. Prior Art

Point of purchase displays for small size goods are well known. Such displays are often fabricated from metal or plastic, and are fabricated to be quickly set up and knocked down, in order to accommodate the needs of the particular business establishment, as well as the changing promotional events that prompt the use of the point of purchase display.

However, such metal and/or plastic displays are typically very generic in shape, little more than open-topped or open-front bins in which the goods are piled or stacked. Furthermore, such metal and/or plastic displays can be relatively heavy and/or bulky, even in their broken down form, and can be relatively expensive to fabricate, especially since they are not always intended for multiple uses, and are discarded after only one use.



It would also be desirable to provide a point of purchase display that is modular in nature, in that individual display units are provided that may be used singly, or in modular combinations thereof.

These and other desirable characteristics of the invention will become apparent in light of the present specification, including claims, and drawings.

## SUMMARY OF THE INVENTION

The present invention is directed to a point of purchase display apparatus for the facilitated display of products, comprising at least one cartridge, having an open face, for containing a plurality of products; at least one self-supporting display shell having a display opening in a face thereof. The at least one self-supporting display shell is operably configured for enabling positioning of the open face of the at least one cartridge in alignment with at least a portion of the display opening of the at least one self-supporting display shell. At least one brace member is operably configured for supporting the at least one cartridge within the at least one self-supporting display shell, to place the open face of the at least one cartridge in alignment with at least a portion of the display opening of the at least one self-supporting display shell.

A preferred embodiment of the invention further comprises means for controlling removal of products from the display, operably configured to substantially preclude the simultaneous removal of more than one product from a single cartridge from the display apparatus. The means for controlling removal of products from the display preferably comprises at least one tab member operably emanating from a side edge of the display opening, the at least one tab member being further operably located, relative to the open face of the at least one cartridge, so that not more than one product can pass between an edge of the open face of the at least one cartridge and the

at least one tab member, without requiring destructive mutilation of at least some portion of the display apparatus.

In an embodiment of the invention, the display shell is operably configured to enable a plurality of cartridges to be positioned with their open faces in alignment with portions of the display opening. The brace member is preferably operably configured for supporting the plurality of cartridges with their open faces in alignment with portions of the display opening.

The point of purchase display apparatus, according to an embodiment of the invention, further comprises a plurality of self-supporting display shells, each display shell being provided with at least one brace member, supporting at least one cartridge.

In such an embodiment, the plurality of self-supporting display shells may be substantially identical in configuration.

In such an embodiment, the point of purchase display apparatus may further comprise means for modularly connecting the plurality of self-supporting display shells.

The means for modularly connecting the plurality of self-supporting display shells may comprise a bottom form structure, operably configured to receive and stabilize bottom ends of at least two self-supporting display shells. A standing form may be operably configured to engage and connect at least two self-supporting display shells to one another. The means for modularly connecting the plurality of self-supporting display shells may

further comprise a lock member operably configured to engage and connect at least two self-supporting display shells to one another.

In the point of purchase display apparatus where a plurality of display shells are provided, the display apparatus may further comprise means for facilitating transportation of the plurality of self-supporting display shells. Each display shell being provided with at least one brace member, supporting at least one cartridge, the means for facilitating transportation may comprise a bottom cap, operably configured to receive and stabilize bottom ends of at least two self-supporting display shells; a top filler member, operably configured to rest atop top ends of at least two self-supporting display shells; a top cap, operably configured to receive and stabilize the top filler member, and, in turn, top ends of at least two self-supporting display shells; and a shroud, operably configured to surround at least two self-supporting display shells. The bottom cap being may further operably be configured to receive and restrain a bottom edge region of the shroud, and the top cap may further be operably configured to receive and restrain a top edge region of the shroud.



## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a chart illustrating various components for assembling the point of purchase displays of the present invention.

Fig. 1a is a plan view of a blank for a tower shell for the point of purchase display, in accordance with a preferred embodiment of the invention.

Fig. 2 is a perspective view of the tower shell of Fig. 1, as set up.

Fig. 3 is a perspective view of the brace for the tower shell of Fig. 1.

Fig. 4 is a plan view of a blank for a cartridge for holding products that is held within the tower shell.

Fig. 5 is a perspective view of a cartridge that has been set up from the blank of Fig. 4.

Fig. 6 is a front perspective view of a completely assembled point of purchase display tower, into which a brace and three cartridges have been mounted.

Fig. 7 is a perspective view of a bottom form that has been partially erected, which may be used in an alternative embodiment of the invention, in which plural tower shells may be used.

Fig. 8 is a perspective view of the center form that has been erected, which may be used in an alternative embodiment of the invention, in which plural tower shells may be used.

Fig. 9 is a perspective view of a top lock, for use with the center form of Fig. 8.

Fig. 10 is a plan view of a side panel, which may be used, in an alternative embodiment of the invention, in which plural tower shells may be used.

Fig. 11 is a perspective view of a fully erected point of purchase display, in an alternative embodiment of the invention, in which plural tower shells may be used.

Fig. 12 is a top view, partially in section, of the point of purchase display of Fig. 11.

Fig. 12a is an enlarged, close-up partially sectional view of the top of the point of purchase display of Fig. 11, showing the engagement of the top lock and one of the tower shells.

Fig. 13 is a side elevation, in section of one of the tower shells, as used in the point of purchase display in the embodiment of Fig. 11.

Fig. 13a is a rear perspective view of a partially set up point of purchase display of Fig. 11, showing the engagement of one tower shell, with the bottom form and the center form.

Fig. 14 is a plan view of a blank for a countertop point of purchase display, in an alternative embodiment of the present invention.

Fig. 15 is a plan view of a blank for a support for the countertop point of purchase display of Fig. 14.

Fig. 16 is a plan view of a blank for a cartridge for the countertop point of purchase display of Fig. 14.

Fig. 17 is a perspective view of an erected countertop point of purchase display.

Fig. 18 is a chart illustrating the steps in assembling a cartridge for the point of purchase displays of Figs. 1a - 13a.

Fig. 19 is a chart illustrating steps in the assembly of the tower for the point of purchase displays of Figs. 1a - 13a.

Fig. 20 is a chart illustrating further steps in the assembly of the tower for the point of purchase display, particularly for the point of purchase display that employs plural tower shells.

Fig. 21 is a perspective fragmentary view of a tower display according to one of the embodiments of the present invention, showing the product removal control feature in effect.

## DETAILED DESCRIPTION OF THE DRAWINGS

While this invention is susceptible of embodiment in many different forms, there is shown in the drawings and will be described herein in detail, a specific embodiment, with the understanding that the present invention is to be considered as an exemplification of the principles of the invention and is not intended to limit the invention to the embodiment illustrated.

The present invention is directed to point of purchase displays in several embodiments. One embodiment employs a single tower unit. Another embodiment employs plurality tower units, connected in modular fashion. Another embodiment is a countertop "tower". All of the units employ "cartridges" for actually holding the products within the supporting towers.

The point of purchase displays of the present invention may be shipped to the ultimate destination in broken down form, or they may be erected, even filled with product, and then shipped. In such cases, dunnage structures are provided, for providing protection, support and stability to the erected point of purchase displays, during shipment.

While the description, and drawing captions may make reference to DVD's as being the product that is intended to be displayed in the point of purchase displays of the present invention, it is to be understood that other types of products, that have rectangular parallelepiped configurations, may be displayed, and that one of ordinary skill in the art, having the present disclosure before them, will be able to make such suitable modifications in dimensions, etc., to accommodate such other kinds of products.

Fig. 1 is a chart illustrating various components for assembling the point of purchase displays of the present invention. For two of the embodiments of the present invention, the floor-standing single and plural tower embodiments, several of the components shown in Fig. 1 are common to both embodiments, as will be addressed in further detail herein. Others of the components shown in Fig. 1 are to be used solely with the plural tower embodiment, and will be identified as such herein. The components of Fig. 1 are not shown to scale, relative to one another.

Shroud 22, top and bottom cap 24 and shipping filler 26 are dunnage devices used only when a plural tower point of purchase display is being shipped pre-assembled.

Center form 32, bottom form 34, top lock 40, and side panels 42 are used solely in forming a plural tower point of purchase display.

Center filler 28, universal filler 30, brace 36, tower shell 38 and cartridges 44 are used in both single and plural tower shell embodiments.

Fig. 1a is a plan view of a blank for a tower shell for the point of purchase display, in accordance with a preferred embodiment of the invention. Fig. 2 is a perspective view of the tower shell of Fig. 1, as set up.

Tower shell 38 is preferably formed from a single blank of corrugated paperboard material, as shown in Fig. 1a. The dashed lines typically indicate fold lines, and solid lines typically indicate cuts, free edges or the crease or edge resulting from a fold, when located in an interior portion of a view. This convention shall apply to the remaining Figures in this present disclosure,

unless otherwise specified. One of ordinary skill in the art, having the present disclosure before them, will be able to readily perceive and identify such fold lines, cuts, free edges, creases or edges.

The blank for tower shell 38 comprises outer wall 46, sidewalls 48 and 50, back wall 52, with tabs 54. Strip 56 emanates from sidewall 48, to permit the formation of slots 58. The blank also includes top wall 60, webs 62 and 64, and locking panel 66, with tab 68. Cuts in outer wall 46 form flaps 70, 72, 74 and 76. Arcuate cuts 78 form arcuate tabs 80, when flaps 70 - 76 are folded inwardly. Slots 82 and 84 are also provided, as is U-shaped cut 86 that forms folding panel 88.

Fig. 3 is a perspective view of the brace for the tower shell of Fig. 1a. Brace 36 is also shown in Fig. 1. Brace 36 comprises center panel 90, side panels 92 and 94, support walls 96 and 98, locking support wall 100 with slit 102, and locking support wall 104 with slit 106. Side panels 92 and 94 may or may not be provided with rectangular notches on their vertically sloping free edges, as shown in Fig. 1 and omitted in Fig. 3. Vertical slots 108 and horizontal slots 110 are also provided.

Fig. 4 is a plan view of a blank for a cartridge 44 for holding products that is held within the tower shell. The blank for cartridge 44 preferably comprises outer panels 112, 114, 116 and 118. Attachment web 120 emanates from outer panel 112. Top side panels 126 and 124 emanate from outer panels 114 and 118, respectively. Top length panels 122 and 128 emanate from outer panels 112 and 116, respectively. Bottom end panels

130, 132 emanate from outer panels 114 and 118, respectively. Bottom length panel 134 emanates from outer panel 116. Flap 136 extends from bottom length panel 134. Tabs 138, 140, 142 and 144 are formed preferably by appropriate die cuts. Elongated generally rectangular slot 146 is formed in outer panel 118 and top side panel 124. Fig. 5 is a perspective view of a cartridge 44 that has been set up from the blank of Fig. 4.

Preferably, all of the tabs in this or any of the embodiments of the invention, that are used to connect the cartridges to respective brace members, are barbed so that the tabs have maximum widths that are slightly greater than the respective slots into which the tabs are to be received. Such a structure aids in holding the cartridges in connection with their respective brace members. This further aids in making it more difficult to accomplish outright removal of a cartridge, in one piece, from a display, without requiring considerable effort and resultant detectable damage to the display.

Fig. 6 is a front perspective view of a completely assembled point of purchase display tower 148, into which a brace and three cartridges have been mounted. In one preferred embodiment of the invention, a tower 148 can be used by itself, as a point of purchase display.

In an alternative embodiment of the invention, three such towers 148 can be modularly assembled together, using bottom form 34, center form 32, top lock 40, and three side panels 42.

Fig. 7 is a perspective view of a bottom form 34 that has been partially erected, which may be used in an alternative embodiment of the

invention, in which plural tower shells may be used. The blank from which form 34 is formed has three branches 150, preferably at 120° angles to one another. In Fig. 7, one branch of bottom form 34 has been completely erected, one is in the process of being erected, and one is shown still flat, to facilitate viewing of the several panels. In a preferred embodiment, all the branches are identically configured. Each branch includes a central panel 152, two outer side panels 154 and 156, two inner side panels 158 and 160 emanating from the respective outer side panels, an end panel 162 and two support flaps 164 and 166. Four slots 168 are provided to receive tabs 170, when outer side panels 154, 156 are folded perpendicular to central panel 152, and inner side panels 158, 160 are further folded inward to be parallel and in overlying relation to outer side panels 154, 156.

Fig. 8 is a perspective view of the center form 32 (also shown in Fig. 1) that has been erected, which may be used in the alternative embodiment of the invention, in which plural towers 148 may be used. Center form 32 includes three wide elongated panels 172, 174 and 176. Each of panels 172, 174 and 176 has a horizontal slot 178 located near its top edge. Panels 172 and 174 are separated by a thin panel 180. Panels 174 and 176 are separated by a thin panel 182. Two thin panels 184, 186 emanate from an opposite side of panel 176. Tabs 188 emanate from a free edge of panel 172, and are configured to fit into suitably located slots (not shown) preferably positioned along the vertical fold line between panels 184 and 186. Assembly of center form 32 may readily be obtained by folding the



blank along all the vertical fold lines, to obtain the shape indicated in Fig. 8, and then inserting the tabs 188 into their respective slots.

Fig. 9 is a perspective view of top lock 40, for use with center form 32 of Fig. 8. Like bottom form 34, top lock 40 preferably has three branches 190, emanating from a triangular central panel 191. Each branch 190 has a center panel 192, two side panels 194 and 196, and two tabs 198 and 200, emanating therefrom, respectively. In Fig. 8, two branches are shown fully erected, and one shown lying flat.

Fig. 10 is a plan view of a side panel 42, three of which may be used, in the alternative embodiment of the invention, in which plural towers 148 may be used. Two thin panels 204 and 206 emanate from opposite sides of center panel 202. Two "C"-shaped cuts define tabs 208 and 210. Two triangular top panels 212 and 214 emanate from the top edge of center panel 202. Flap 216 with tab 218 emanates from top panel 212. Flap 220 with tab 220 emanates from top panel 214.

Fig. 11 is a perspective view of a fully erected point of purchase display, in an alternative embodiment of the invention, in which three towers 148 are used. Fig. 12 is a top view, partially in section, of the point of purchase display of Fig. 11. In particular, three different sections A, B and C are shown that are taken along different positions along the height of the display, as indicated in Fig. 13. Fig. 12a is an enlarged, close-up partially sectional view of the top of the point of purchase display of Fig. 11, showing the engagement of the top lock and one of the tower shells. Fig. 13

is a side elevation, in section of one of the tower shells, as used in the point of purchase display in the embodiment of Fig. 11. Fig. 13a is a rear perspective view of a partially set up point of purchase display of Fig. 11, showing the engagement of one tower shell, with the bottom form and the center form.

The assembly of a single tower 148, and its subsequent integration into a modular, three-tower display will now be described. Fig. 18 is a chart illustrating the steps in assembling a cartridge for the point of purchase displays of Figs. 1a - 13a. Fig. 19 is a chart illustrating steps in the assembly of the tower for the point of purchase displays of Figs. 1a - 13a. Fig. 20 is a chart illustrating further steps in the assembly of the tower for the point of purchase display, particularly for the point of purchase display that employs plural tower shells.

First, as shown in Fig. 18, a sufficient quantity of cartridges 44 must be assembled. The blank is folded into a rectangular tube, by bending the blank until attachment web 120 overlaps, to the inside, a portion of outer panel 118, and is affixed thereto, preferably by adhesive. This can be done prior to shipment, if desired, and the rectangular tube flattened for shipment. When the tube is ready for formation, bottom end panels 130 and 132 are folded inwardly (Step 1 of Fig. 18). Bottom length panel 134 is then folded across the open end of the cartridge, and flap 136 is inserted into the slot defined by the edge of outer panel 112, and the edges of bottom end panels 130 and 132 (Step 2 of Fig. 18). Top side panels 124 and 126 are then

folded in, until they are parallel to outer panels 118 and 114, respectively (Step 3 of Fig. 18). Top length panels 128 and 122 are then folded in until they are parallel to outer panels 116 and 112, respectively (Step 4 of Fig. 18).

At this time, the cartridge may be loaded with product, such as DVD boxes. According to one preferred embodiment of the invention, the depth of the cartridge is configured to enable 11 conventional commercial DVD packages to be received, standing upright on their shortest wall (other configurations of course may be selected). It may be desirable to have a fewer number of packaged in the cartridges. However, to prevent the cartridges from appearing empty, and to prevent the product packages from moving loosely in the cartridges, universal spacer 30 may be used. As shown in Steps 5 and 6 of Fig. 18, each spacer 30 as a central panel that is approximately the width of the interior space of an erected cartridge, and several successive pairs of side panels, the width of each being approximately the depth of one, or a predetermined multiple of product packages standing upright. By selectively folding the side panels of the universal spacer 30, a dunnage device having a depth equivalent to a predetermined multiple of product packages is created to occupy the space that would have otherwise been occupied by product packages in a "full" cartridge.

Fig. 19 illustrates the steps in erecting a tower 148, and the initial steps in fabricating a modular three-tower display. Flaps 70, 72, 74, 76 are

fold in and the blank for tower shell 38 is laid face down on a surface. Three cartridges are laid with their open sides face down, and the elongated slots toward what will be the narrow, top end of the tower. The flaps from the shell blank will be to the outside of the three cartridges. (Step 1 of Fig. 19) Tabs 138 - 144 will project upwardly.

Brace 36 is folded so that side panels 92 and 94 are perpendicular to center panel 90. Support walls 96 and 98 are folded perpendicular to center panel 90, extending away from center panel 90 in an opposite direction to side panels 92, 94. Locking support walls 100 and 104 are folded toward one another, with slits 102 and 106 "intersecting", so that the two locking support walls interdigitate, with a top portion of one locking support wall to the outside of the other, and the bottom portion of the other locking support wall to the outside of the first. Brace 36 is then placed down on the backs of cartridges 44, with side panels 92, 94 projecting upwardly. Vertical slots 108 and horizontal slots 110 are aligned with respective ones of tabs 138 - 144 on each of cartridges 44, until the tabs pass through the slots. (Step 2 of Fig. 19)

Side walls 48 and 50 are then folded around, until back wall 52 covers the back of brace 36, and abuts the free edges of side panels 92 and 94. Tabs 54 are then inserted into slots 58, and top wall 60 is folded down, and tab 68 is inserted into slot 84. (Step 3 of Fig. 19)

This procedure completes the assembly of one point of purchase display tower 148. When cartridges 44 are filled with product packages,

tabs 80 help prevent the packages from simply falling out of the cartridges. Instead, the product packages (not shown) must be tipped and lifted slightly to clear the tabs 80.

If it is desired to form a three-tower modular display, bottom form 34 is erected, as previously described. (Step 4 of Fig. 19) Center form 32 is then erected, as previously described (Step 5 of Fig. 19) Center form 32 is then placed in the center of bottom form 34. Each tower 148 is placed into a branch of bottom form 34, and a folding panel 88 is pulled out from the back of each respective tower, and inserted into a corresponding slot 178 in center form 32. (Step 6 of Fig. 19)

Top lock 40 is then erected (Step 1 of Fig. 20) and placed atop the center form 32. Tabs 198 and 200 of each branch are then inserted into slots 82 on the sides of the tower shells 38. (Step 2 of Fig. 20) The side panels 42 are attached by folding the thin panels 204 and 206 back upon the center panel 202. Adhesive strips (not shown) will be placed on the sides of thin panels 204 and 206 that will bear against the sides of the towers. Tabs 208 and 210 will be received in suitably located slots in the front edges of the towers 148. (Step 3 of Fig. 20) A center filler 28 is then folded into a tube, and affixed, as by inserting the tab (Fig. 1) into a suitably located slot. Filler 28 is then dropped into the space above the top lock 40. Small articles, such as lug-ons (what are these?) may be placed in the open center filler 28. (Step 4 of Fig. 20)

If it is desired to actually ship a fully erected and loaded three-tower display, then first top and bottom caps 24 are erected by folding up the sides and inserting the tabs into the slots that are provided. See Fig. 1 for a plan view of the blank for caps 24. (Step 5 of Fig. 20) The pyramid of three towers is then placed into a bottom cap 24. The sides of the top shipping filler 26 (see Fig. 1 for a plan view of the blank) are then placed atop the center filler 28. Shroud 22 is folded along its vertical fold lines, and inserted between the bottoms of the towers and the wall of the bottom cap. Top cap 24 is then placed atop the top edges of shroud 22. Suitable straps may secure the package.

A still further alternative embodiment of the invention is a countertop point of purchase display that continues the theme of the tower shape and the use of cartridges to hold the product packages of the previously described embodiments.

Fig. 14 is a plan view of a blank for a countertop point of purchase display, in an alternative embodiment of the present invention.

Mini tower shell 238 is preferably formed from a single blank of corrugated paperboard material, as shown in Fig. 14. The dashed lines typically indicate fold lines, and solid lines typically indicate cuts, free edges or the crease or edge resulting from a fold, when located in an interior portion of a view. This convention shall apply to the remaining Figures in this present disclosure, unless otherwise specified. One of ordinary skill in the

art, having the present disclosure before them, will be able to readily perceive and identify such fold lines, cuts, free edges, creases or edges.

The blank for tower shell 238 comprises outer wall 246, sidewalls 248 and 250, back wall 252, with side tabs 254 and top and bottom tabs 255. Strip 256 emanates from sidewall 250, to permit the formation of slots 258. The blank also includes top wall 260, and locking panel 262, with slot 264. Locking panel 266 emanates from bottom wall 268, with slot 269. Flaps 270, 271 emanate from side wall 250. Flaps 272, 273 emanate from side wall 248. Cuts in outer wall 246 form flaps 280, 282, 284, 286. Arcuate cuts 288 form arcuate tabs 290, when flaps 280, 282, 284, 286 are folded inwardly. Slots 82 and 84 are also provided, as is U-shaped cut 86 that forms folding panel 88.

Fig. 15 is a plan view of a blank for a support for the countertop point of purchase display of Fig. 14. Brace 336 comprises center panel 340, side panels 342 and 344 and support wall 346 with flap 348. Vertical slots 350 and horizontal slot 352 are also provided.

Fig. 16 is a plan view of a blank for a cartridge for the countertop point of purchase display of Fig. 14. The blank for cartridge 354 preferably comprises outer panels 356, 358, 360, 362. Attachment web 364 emanates from outer panel 362. Top side panels 366, 368 emanate from outer panels 356 and 360, respectively. Top length panels 370, 372 emanate from outer panels 358, 362, respectively. Bottom end panels 374, 376, emanate from outer panels 356, 360, respectively. Bottom length panel 378 emanates

from outer panel 358. Flap 380 extends from bottom length panel 378. Tabs 382, 384, and 386 are formed preferably by appropriate die cuts. Elongated generally rectangular slot 388 is formed in outer panel 356 and top side panel 366. Cartridge 354 is erected in a manner substantially identical to that of cartridge 44.

Fig. 17 is a perspective view of an erected countertop point of purchase display 239. Assembly of display 239 is accomplished by assembling cartridge 354, folding flaps 280, 282, 284 and 286, setting mini tower shell 238 face down, and placing cartridge 354 open side down on the shell blank, so that the flaps are on the inside of the opening of the cartridge. Brace 336 is connected to the back of cartridge 354, by aligning center panel 340 so that vertical slots 350 align with and receive tabs 382 and 386, and horizontal slot 352 aligns with and receives tab 384. Support wall 346 is folded to an acute angle relative to center panel 340, and flap 348 is folded up relative to support wall 346. Shell 238 is folded around cartridge 354 and brace 336, by folding up the side panels 250, 252, folding in flaps 270 - 273, folding up top panel 260 and bottom panel 268, and folding over back panel 252 across the back of cartridge 354, and tucking tabs 254 into slots 258, and tabs 255 into slots 264 and 269.

Each of the three illustrated and described embodiments includes as a key feature, a product removal control system. As demonstrated in Fig. 21, in which a fragment of a display tower 148 is shown, in which the topmost cartridge 44 is filled with packages 400 (e.g., DVD boxes) and/or a universal



spacer (not shown). Preferred embodiments of the invention, the relative dimensions of the height, width and depth of the cartridges, and the relative positioning of tabs 80 (or tabs 290 in the tabletop version) with respect to the top of the cartridge 44 behind a respective pair of tabs 80, are selected so that it is extremely difficult, if not impossible to remove more than one package at a time, without bending out the tabs 80, or otherwise mutilating the display structure. Removal of a package is accomplished by a person inserting a finger 402 into cartridge 44, aided in this by the open end of slot 146. The person then pulls the upper end of the one package 400, until a secure grip is attained. This causes the package to lean outwardly, around the points of contact between the face of the package and an upper edge of each of tabs 80. The person then lifts the package upwardly and away from display 148. As successive packages are removed from any one cartridge 44, it does become easier to remove each individual package; however, the distance between the top of each cartridge and the top edges of tabs 80 should be selected so that at no time can two or more packages be simultaneously pulled from the display, without doing detectable damage to the display structure.

The foregoing description and drawings merely explain and illustrate the invention, and the invention is not limited except insofar as the appended claims are so limited, as those skilled in the art who have the disclosure before them will be able to make modifications and variations therein without departing from the scope of the invention.



We Claim:

1. A point of purchase display apparatus for the facilitated display of products, comprising:

at least one cartridge, having an open face, for containing a plurality of products;

at least one self-supporting display shell having a display opening in a face thereof,

the at least one self-supporting display shell being operably configured for enabling positioning of the open face of the at least one cartridge in alignment with at least a portion of the display opening of the at least one self-supporting display shell; and

at least one brace member, operably configured for supporting the at least one cartridge within the at least one self-supporting display shell, to place the open face of the at least one cartridge in alignment with at least a portion of the display opening of the at least one self-supporting display shell.

2. The point of purchase display apparatus according to claim 1, further comprising means for controlling removal of products from the display, operably configured to substantially preclude the simultaneous removal of more than one product from a single cartridge from the display apparatus.

3. The point of purchase display apparatus according to claim 2, wherein the means for controlling removal of products from the display comprises at least one tab member operably emanating from a side edge of the display

opening, the at least one tab member being further operably located, relative to the open face of the at least one cartridge, so that not more than one product can pass between an edge of the open face of the at least one cartridge and the at least one tab member, without requiring destructive mutilation of at least some portion of the display apparatus.

4. The point of purchase display apparatus according to claim 1, wherein the display shell is operably configured to enable a plurality of cartridges to be positioned with their open faces in alignment with portions of the display opening.

5. The point of purchase display apparatus according to claim 4, wherein the brace member is operably configured for supporting the plurality of cartridges with their open faces in alignment with portions of the display opening.

6. The point of purchase display apparatus according to claim 1, comprising:

a plurality of self-supporting display shells, each display shell being provided with at least one brace member, supporting at least one cartridge.

7. The point of purchase display apparatus according to claim 6, wherein each of the plurality of self-supporting display shells are substantially identical in configuration.

8. The point of purchase display apparatus according to claim 6, further comprising means for modularly connecting the plurality of self-supporting display shells.



a top cap, operably configured to receive and stabilize the top filler member, and, in turn, top ends of at least two self-supporting display shells; and

a shroud, operably configured to surround at least two self-supporting display shells;

the bottom cap being further operably configured to receive and restrain a bottom edge region of the shroud,

the top cap being further operably configured to receive and restrain a top edge region of the shroud.

## ABSTRACT

A point of purchase display for the containment and presentation of products, incorporating one or more cartridges for holding the products, the one or more cartridges being operably supported by a brace member within a shell. The shell, brace and cartridge(s) are all preferably fabricated from corrugated paperboard material. In an alternative embodiment of the invention, a plurality of assembled displays is modularly connected to provide an integrated display unit.










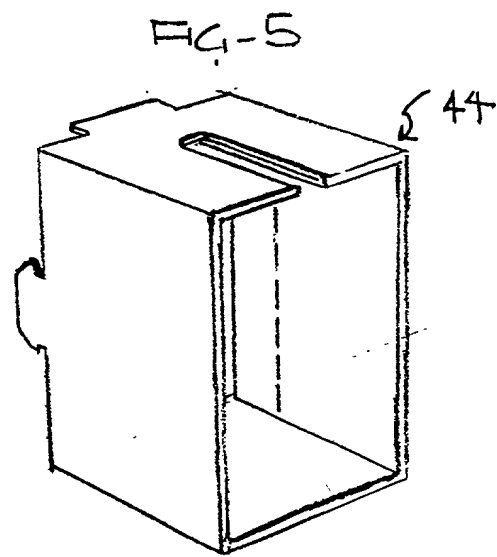





FIG-7

✓ 34

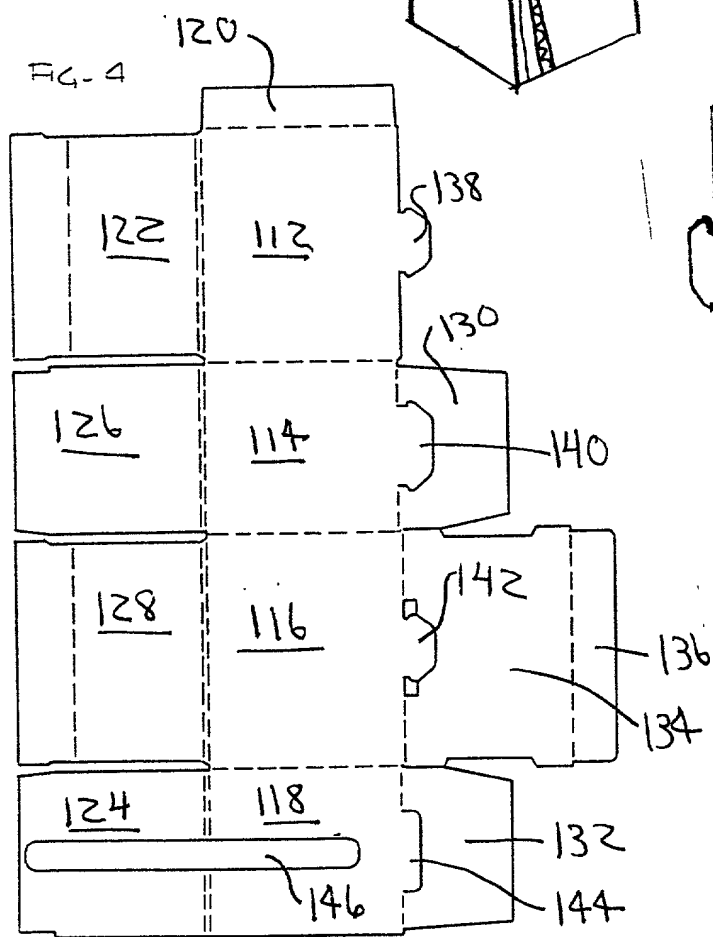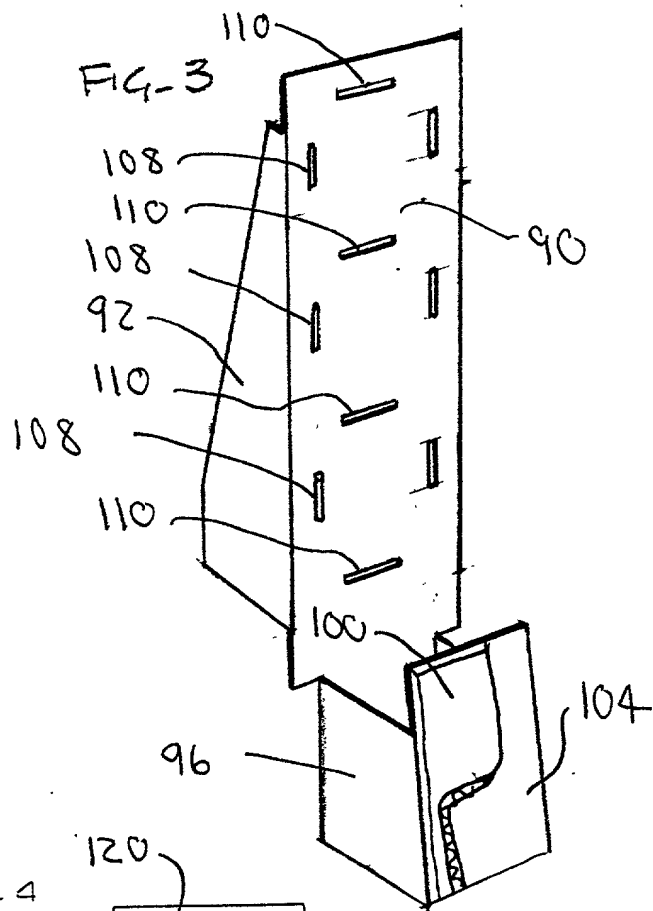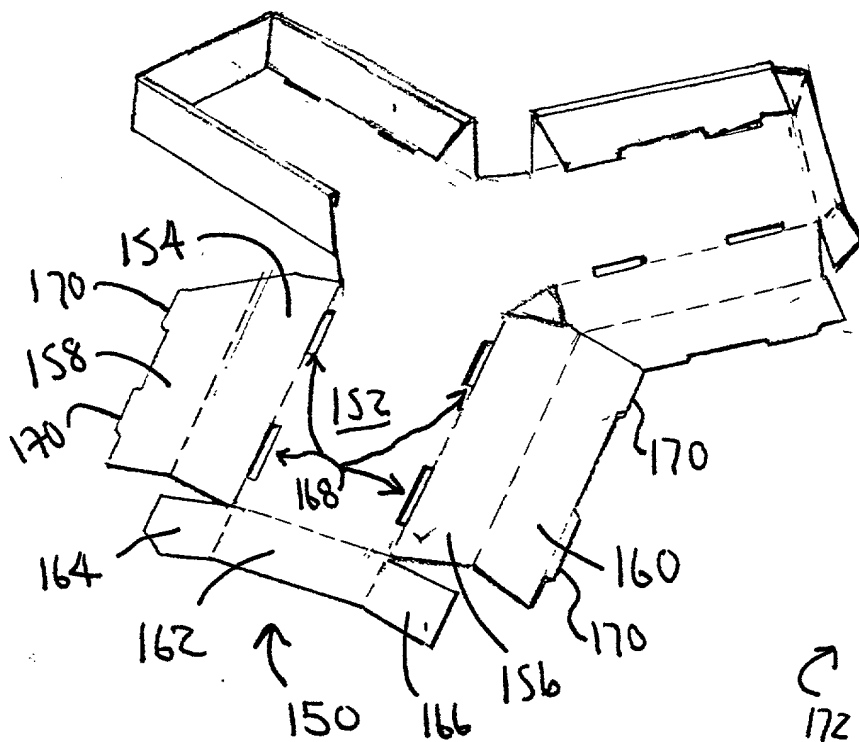


FC-8


40 ↘

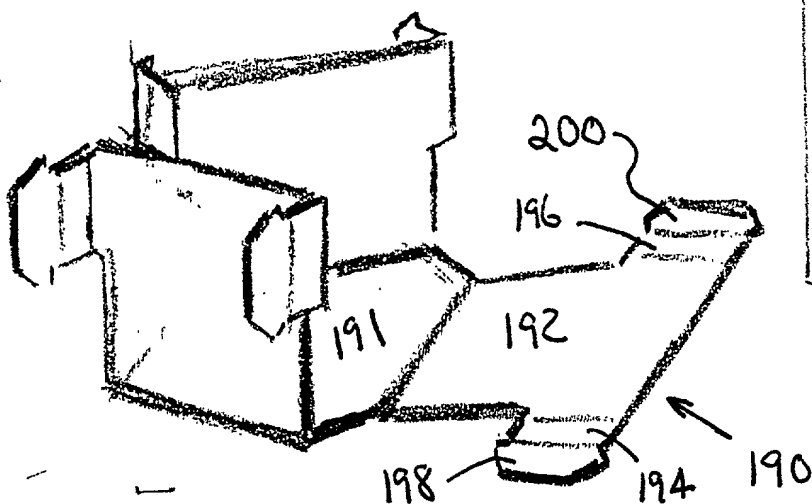


32

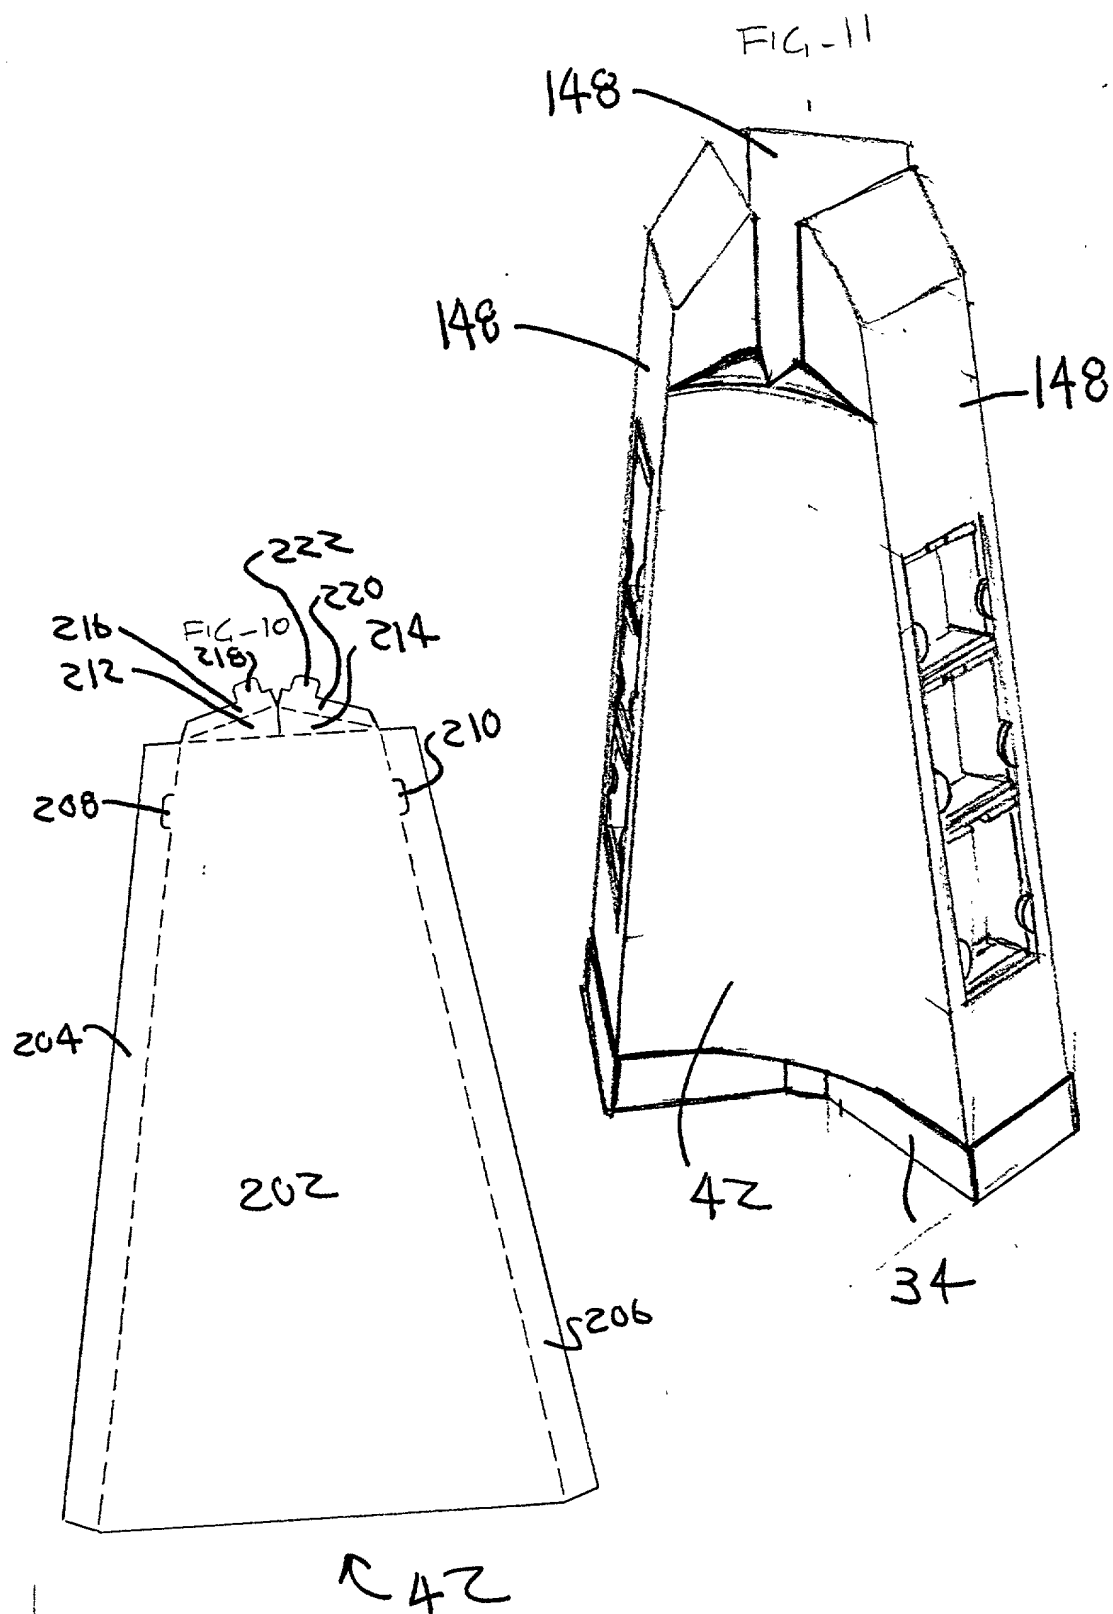[illegible]

1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2729 2730 2731 2732 2733 2734 2735 2736 2737 2738 2739 2740 2741 2742 2743 2744 2745 2746 2747 2748 2749 2750 2751 2752 2753 2754 2755 2756 2757 2758 2759 2760 2761 2762 2763 2764 2765

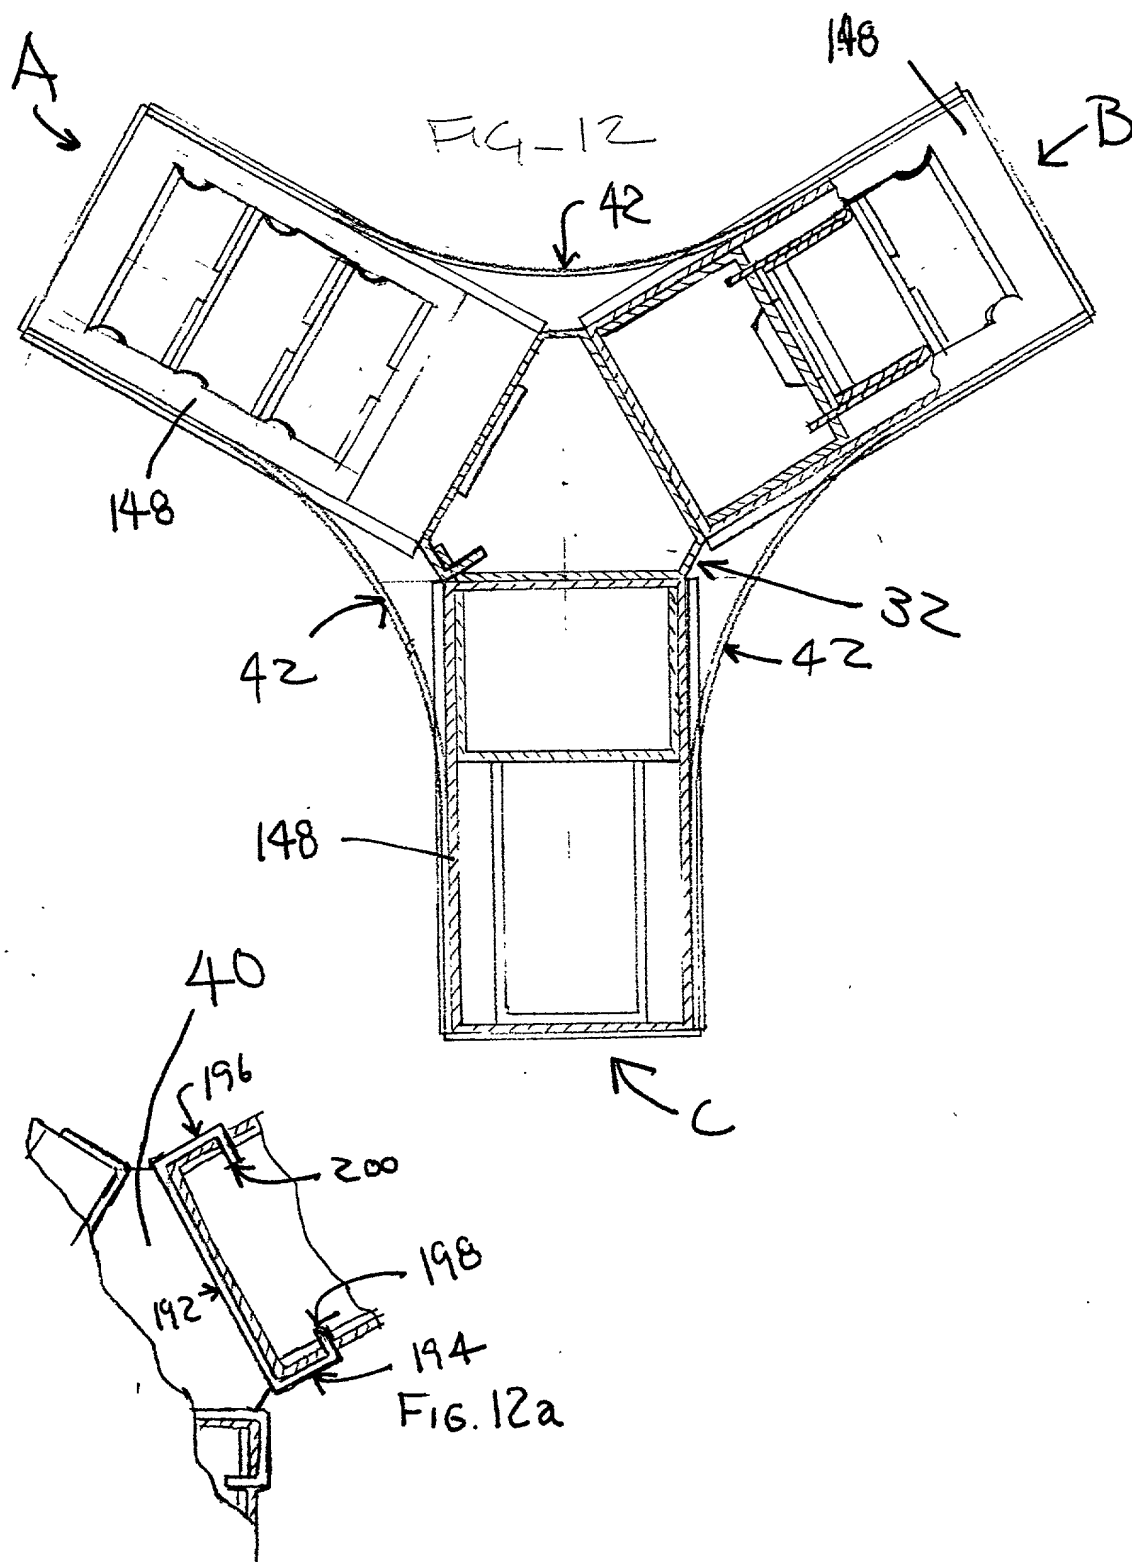

000090 29960960

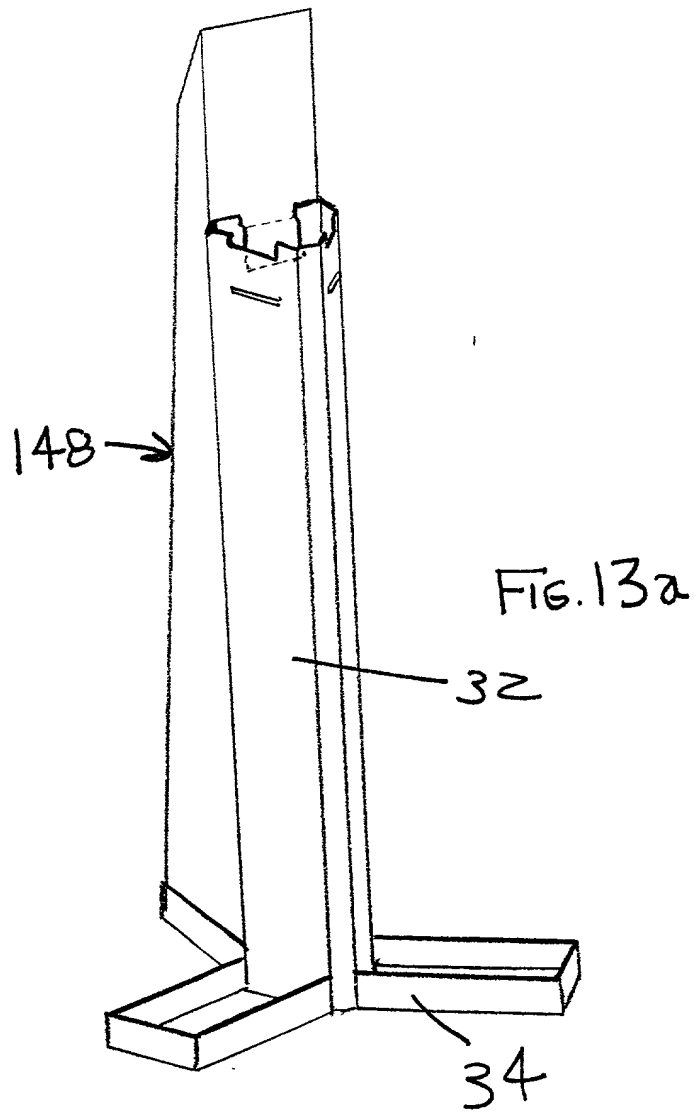





# **DVD TOWER SET-UP INSTRUCTIONS** **CARTRIDGE ASSEMBLY**

1. FOLD UP BOTTOM END PANELS.

2. FOLD UP BOTTOM LENGTH PANEL, TUCK FLAP INTO SLOT.

3. FOLD IN TOP SIDE PANELS.

4. FOLD TOP LENGTH PANELS IN.





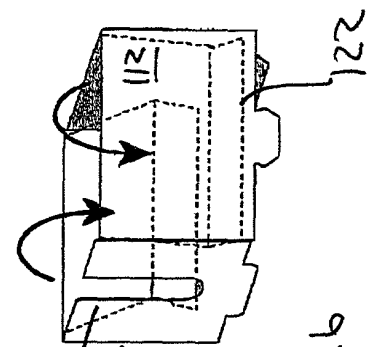


FIG. 18


5. FOLD CARTRIDGE INSERT TO ACCOMMODATE NUMBER OF DVDS.

6. PLACE IN CARTRIDGE AS SHOWN.  
 NOTE: FOR 11 COUNT DVDS NO INSERT IS USED.



302

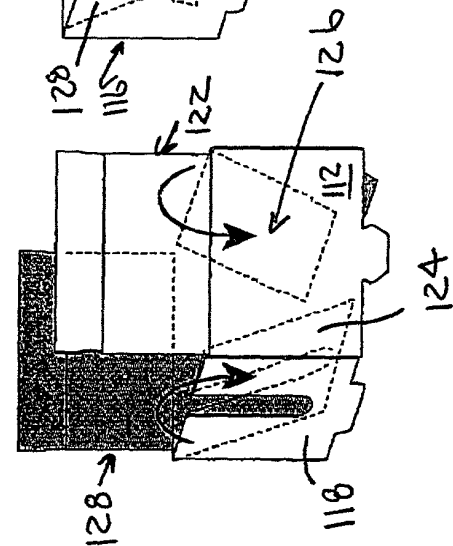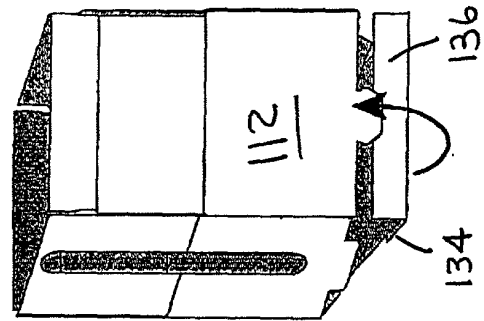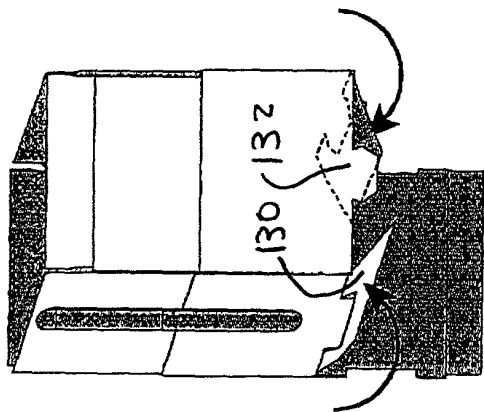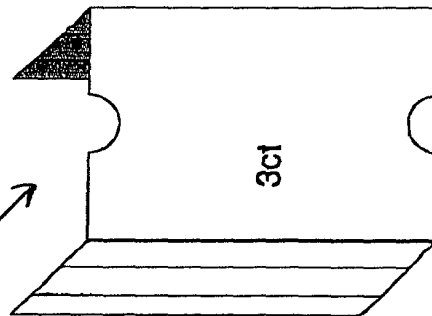

302

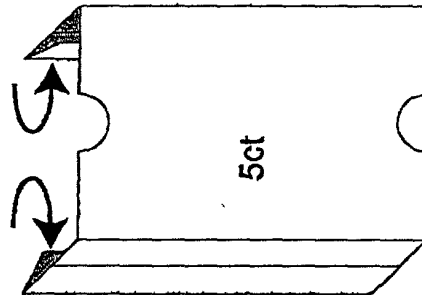

302


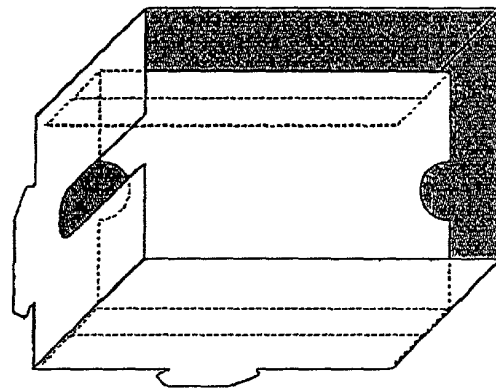
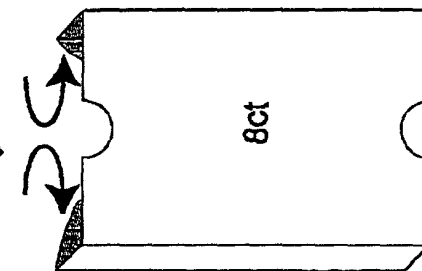





# DVD TOWER SET-UP INSTRUCTIONS

## TOWER ASSEMBLY


1. ASSEMBLE TOP-LOCK. A) FOLD UP THREE SIDE PANELS. B) FOLD LOCKING STRAPS OUT AS SHOWN.
2. PLACE TOP-LOCK IN CENTER OF TOWER AS SHOWN. PUSHING FLOOR DOWN INTO CENTER FORM. LOCK STRAPS INTO SLOTS ON SIDES OF TOWER SHELL, (SEE DETAIL).

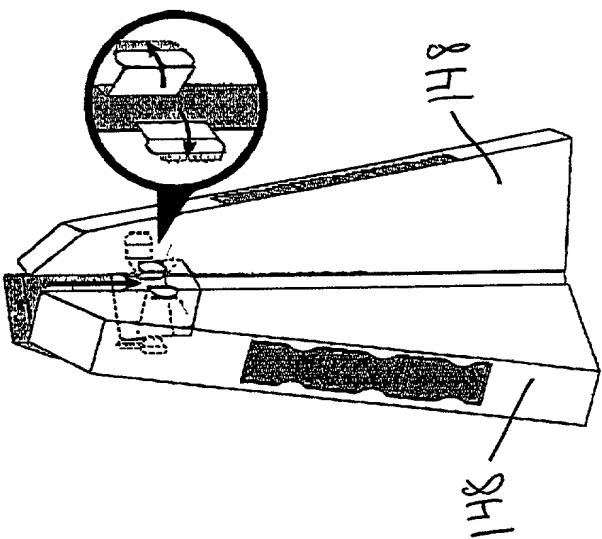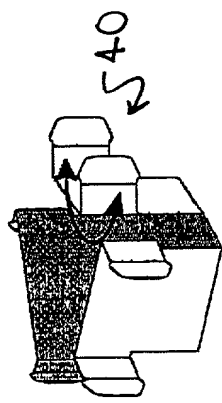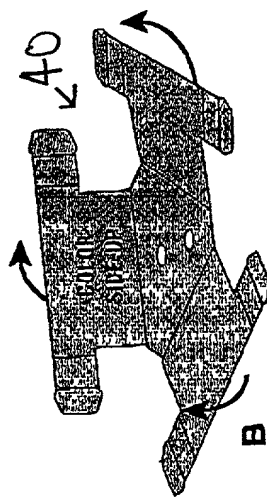

3. ATTACH SIDE PANELS. FOLD BACK ENDS OF SIDE PANEL. REMOVE BACKING FROM ADHESIVE STRIP. LOCK TAB INTO SLOT AND ADHERE TO TOWER SHELL AS SHOWN. ATTACH OPPOSITE SIDE IN SAME MANNER. FOLD DOWN TOP FLAPS. LOCK TAB BEHIND STRAP OF TOP-LOCK.

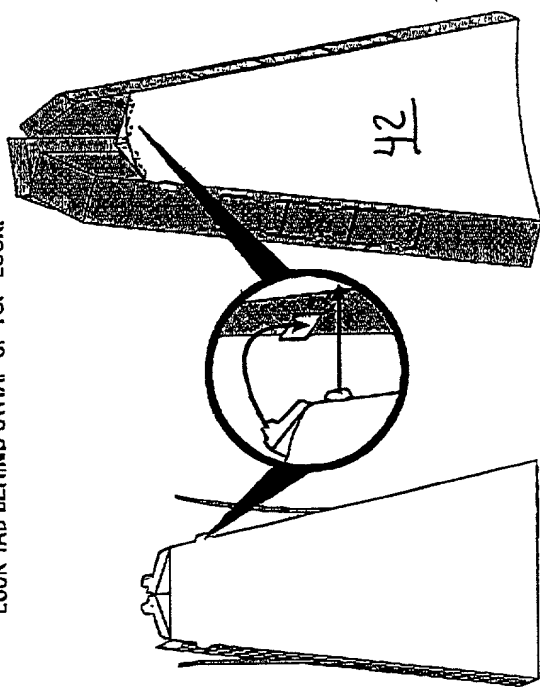

4. FOLD CENTER FILLER, PLACE INTO CENTER OF TOWER. Add bag of lug-ons.
5. ASSEMBLE TOP AND BOTTOM CAP. FOLD UP SLOTTED PANELS. FOLD UP LENGTH PANELS, LOCK TABS IN SLOTS.

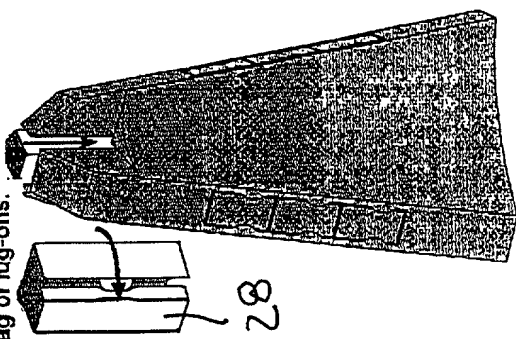

6. PLACE DISPLAY IN BOTTOM CAP. PLACE TOP FILLER ON TOP OF DISPLAY, FITTING OVER CENTER FILLER. PLACE SHROUD AROUND DISPLAY AND COVER WITH TOP CAP. STRAP FOR CLOSURE.



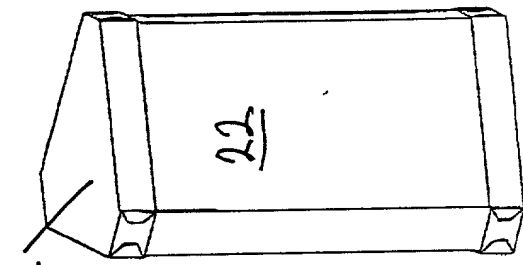


FIG. 20

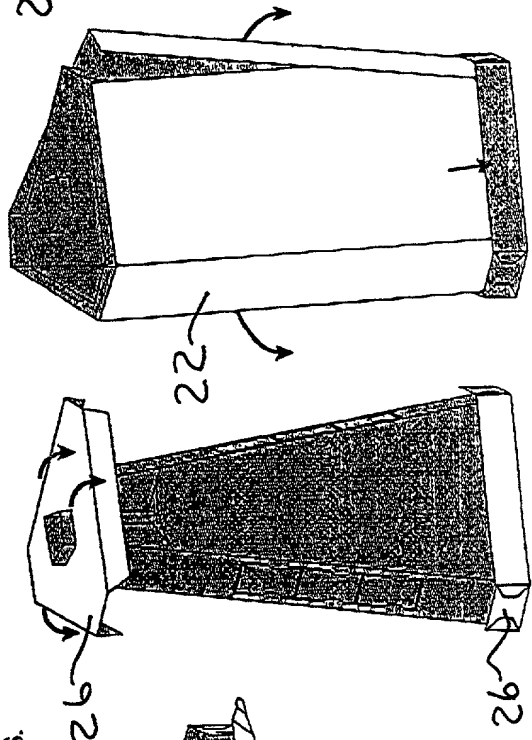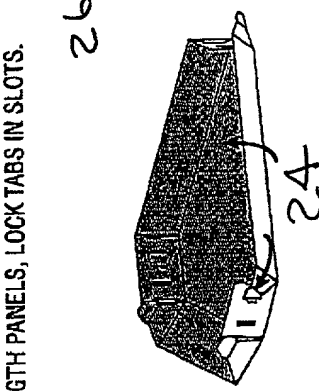

Docket No.  
991331

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### POINT OF PURCHASE DISPLAY

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

<b>Richard D. Harris</b>	<b>Reg. No. 27898</b>
<b>Richard Eugene Dick</b>	<b>Reg. No. 27778</b>
<b>Howard E. Silverman</b>	<b>Reg. No. 32492</b>
<b>John S. Pacocha</b>	<b>Reg. No. 25197</b>
<b>Douglas B. Teaney</b>	<b>Reg. No. 33459</b>
<b>Herbert H. Finn</b>	<b>Reg. No. 38139</b>
<b>James K. Cleland</b>	<b>Reg. No. 44619</b>

**Send Correspondence to: Richard D. Harris**  
**LAW OFFICES OF DICK AND HARRIS**  
**181 West Madison St., Suite 3800**  
**Chicago, IL 60602**

**Direct Telephone Calls to:** *(name and telephone number)*  
**Richard D. Harris (312) 726-4000**

Full name of sole or first inventor <b>David A. Johnske</b>	
Sole or first inventor's signature	Date
Residence <b>Bolingbrook, Illinois</b>	
Citizenship <b>US</b>	
Post Office Address <b>1059 Bothwell</b>	
<b>Bolingbrook, Illinois 60434</b>	

Full name of second inventor, if any <b>Renee E. Richardson</b>	
Second inventor's signature	Date
Residence <b>Sun Valley, California</b>	
Citizenship <b>US</b>	
Post Office Address <b>7884 N. Glenoaks Blvd.</b>	
<b>Sun Valley, California 91352</b>	